



movement joint suitable for grinding

Twin metal plate - grindable infill expansion joint, specifically conceived for terrazzo floor laying, marble, granite, limestone covering jobs necessitating sanding, grinding and/or polishing finish treatments on site, which must necessarily be borne easily by the joints as well.
Suggested flooring bays 16 m²
Illustrated scale dimension 1:1

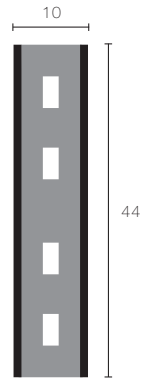

coflex™ CTM



COFLEX CTM-ON* Natural Brass + EPDM

Brass features a good resistance to mechanical impacts and to diluted chemicals yet still maintaining an elegant top finish look. It is applicable for either indoor or outdoor jobs.

Material: Natural Brass
Insert: EPDM
Length: 2,70 metres



COFLEX CTM-IL* Stainless steel AISI 304 - DIN 1.4301 + EPDM

The stainless steel version is particularly suitable for hospital sector and food processing areas for it guarantees a higher tolerance to diluted chemical agents. Good mechanical resistance. It is applicable for either indoor or outdoor jobs.

Material: Stainless steel AISI 304
Insert: EPDM
Length: 2,70 metres

H=mm	Colour	Art.
44	Black	CTM 440 ON 51

H=mm	Colour	Art.
44	Black	CTM 440 IL 51

On request available also with cement grey infill 23.