

technical junction for floors at same height


folocover™ SP

FOLOCOVER SP edges are slightly bent downwards in a rounded-off shape in order to help hide the difference of level up to 2 mm. The arrow head shaped vertical flange can be easily embedded into the gap but it is recommended not to use acetic based silicon for fixing, as brass can oxidize over time.

Some versions of series **FOLOCOVER SP**, thanks to their particular alloy composition, can easily be bent manually in phase of laying to follow into the round contour cuts of flooring decorative design jobs and curves. For further details verify the table at page 27.

FOLOCOVER SP is a profile designed to join two adjacent existing floors at the same height but it can cover imperfections in cutting or slight variations of height to be found on a tiled floor joining to a wooden one for example. Thanks to its shape, available in 3 different widths, this profile helps floor coverings to maintain the minimum distance thus acting also as a dilatation joint.

Illustrated scale dimension 1:1



FOLOCOVER SP-OL Polished Brass

This brass profile is developed with prime choice raw material in order to guarantee the tolerance and endurance to chemical and mechanical solicitations.

Material: Extruded Polished brass
Length: 2,70 metres
Lengths ☒ SP 14: 0,90 / 1,35 m
Widths: 14, 20, 26 mm

BxH	Art.
14x7	SP 14 OL
20x7	SP 20 OL
26x7	SP 26 OL

FOLOCOVER SP-OC Chromed Brass

This profile has a chrome finish which conveys a higher aesthetic touch. It is water proof and resistant to most corrosive agents. Limited tolerance to abrasion, not recommended for high traffic areas.

Material: Extruded Chromed brass
Length: 2,70 metres
Widths: 14, 20 mm

BxH	Art.
14x7	SP 14 OC
20x7	SP 20 OC

FOLOCOVER SP-IL Stainless Steel AISI 304 - DIN 1.4301


This stainless steel profile is an AISI 304 standard which ensures high tolerance to most of diluted chemicals. The profile has a slight difference in shape compared to the brass one due to the special steel rolling process which differs from the brass work process. Available in top brushed finish – code: IS.

Material: Stainless steel AISI 304
Length: 2,70 metres
Lengths ☒ SP 14: 0,90 / 1,35 m
Width: 14, 20 mm

BxH	Art.
14x7	SP 14 IL
20x7	SP 20 IL



The gap between the two adjacent floors allows for final polishing treatments of wooden or marble surface without damaging the bordering one.

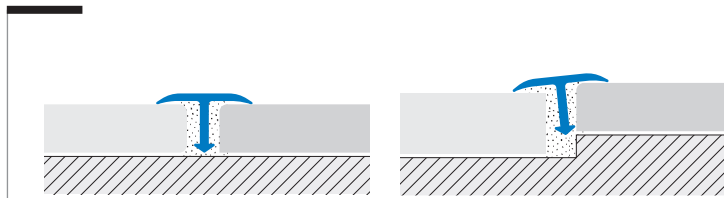

Profiles work as dilatation joint covers, while providing a proper finishing to possible cut or match imperfections between the two floors, as typical in the diagonal patterns.



FOLOCOVER SP-AS Silver Anodised Aluminium

This profile has an approx. 20 micron silver coating and is suitable for both indoor or outdoor application with high tolerance to weather agents but less to mechanical impact. During installation excess adhesive and grout should be removed immediately to avoid stains. The exposed surface may change colour or darken in time. Where higher stresses are involved the use of brass profiles is recommended.

Material: Extruded Anodised aluminium
 Colour: Silver
 Length: 2,70 metres
 Lengths ☒ SP 14: 0,90 / 1,35 m
 Width: 14, 20 mm

BxH	Art.
14x7	SP 14 AS
20x7	SP 20 AS

FOLOCOVER SP* Aluminium Wood Cladding Finish

Profile with a melamine wood tone in 6 different varieties. Good tolerance to abrasion comparable to most melamine coverings. The melamine embossing on the aluminium is particularly smooth therefore it remains quite clean and blends well with the flooring tone.

Material: Aluminium laminate covered
 Length: 2,70 metres
 Lengths ☒ : 0,90 / 1,35 m
 Widths: 14, 20 mm

Finish	W=14 mm	W=20 mm
Maple	SP 14 AC	SP 20 AC
Beech	SP 14 FA	SP 20 FA
Oak	SP 14 RO	SP 20 RO
Cherry	SP 14 CI	SP 20 CI
Light walnut	SP 14 NC	SP 20 NC
Dark walnut	SP 14 NS	SP 20 NS