
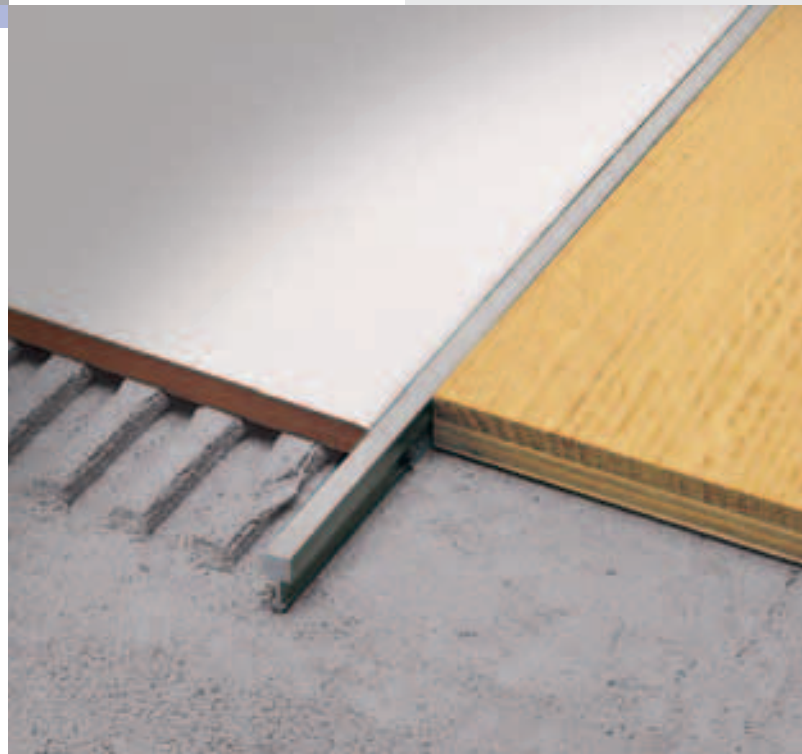
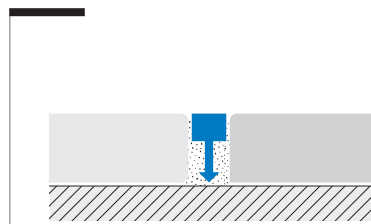


separation profile for matching floors

folojoint™ AD

FOLOJOINT AD is a joint profile for thin bed adhesive laying. It has a 5 mm visible face width at surface and a 4 mm thick body which allows grinding along with the floor covering material in installation. It is also ideal for marble or wood flooring combinations. The arrow shaped vertical flange of this profile ensures a solid mechanical bond within the split cavity.

Illustrated scale dimension 1:1



FOLOJOINT AD-ON Natural Brass

This brass profile is developed with prime choice raw material in order to guarantee tolerance and endurance to chemical and mechanical solicitations. It is primarily applied on both indoor and outdoor floors and can bear intense transit areas as well as for detailing elegant residential coverings. Through contact with moisture or corrosive media, brass may oxidize on exposed surfaces. This situation can be easily solved by buffing the product with a conventional polisher to return to its original shine.

Material: Extruded Natural brass
Length: 2,70 metres
Width: 5 mm
Heights: 10 mm and 14 mm

| BxH | Art. |
|------|----------|
| 5x10 | AD 10 ON |
| 5x14 | AD 14 ON |

FOLOJOINT AD 10 AN Natural Aluminium

This profile is developed in conformity with the UNI standards. It has little tolerance to mechanical or chemical solicitation. During installation, excess adhesive and grout should be removed immediately to avoid stains. The exposed surface may change color or darken in time. Outdoors or where higher stresses are involved the use of brass profiles is recommended.

Material: Extruded Natural aluminium
Length: 2,70 metres
Width: 5 mm
Height: 10 mm

| BxH | Art. |
|------|----------|
| 5x10 | AD 10 AN |