
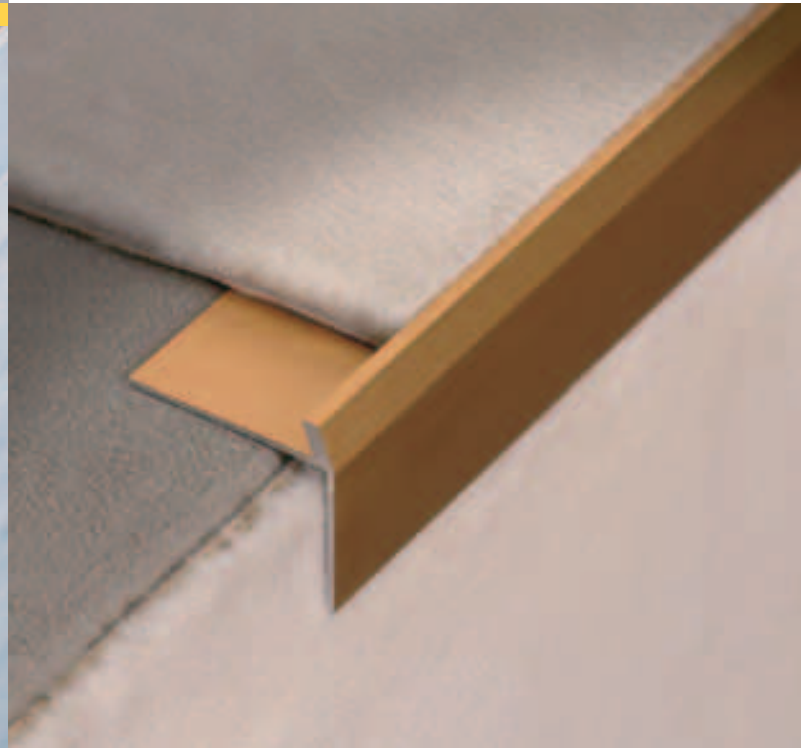


# stair nosing profiles for linoleum, carpet and PVC coverings

folostair™ SC-SM

**FOLOSTAIR SC** and **SM** are stair nosing profiles designed for stair coverings in resilient or in carpet material. Just apply the covering material on the rise of the step and then fix the profiles. Now the tread of the step can be covered with the material so that the finishing work with the profiles ensures the stronghold of the resilient material. The vertical tooth of the profiles over the riser of the step helps further protect the covering material.

Illustrated scale dimension 1:1

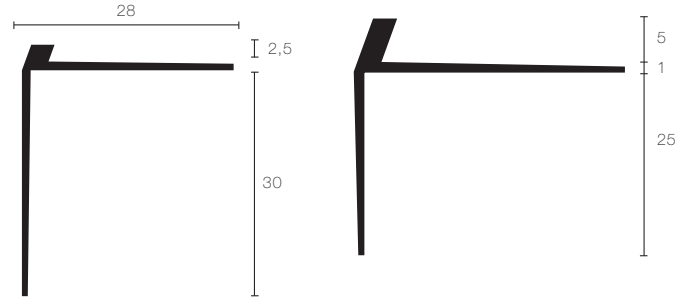

## FOLOSTAIR SC 30 A\*N Anodised Aluminium

Stair nosing profile for resilient flooring suitable for thicknesses ranging between 2 and 3 mm. Fast and lasting stair step finish.

This anodised aluminium profile has an approx. 20 micron coating and is supplied in Silver, Gold and Bronze finish. It is tolerant to oxidation.

Material: Extruded Anodised aluminium  
Length: 2,70 meters  
Colours\*: Silver, Gold, Bronze

H <sub>1</sub> +H	Art.
2,5+30	SC 30 ASN
2,5+30	SC 30 AON
2,5+30	SC 30 ABN

## FOLOSTAIR SM 25 A\*N Anodised Aluminium

Stair nosing profile for carpet or linoleum flooring suitable for thicknesses between 4 and 6 mm. This anodised aluminium profile has an approx. 20 micron coating and is supplied in Silver, Gold and Bronze finish. It is tolerant to oxidation.

Material: Extruded Anodised aluminium  
Length: 2,70 meters  
Colours\*: Silver, Gold, Bronze

H <sub>1</sub> +H	Art.
5+25	SM 25 ASN
5+25	SM 25 AON
5+25	SM 25 ABN