

# stainless steel stair nosing safety profile after the laying

folostair™ SI



## FOLOSTAIR SI 400 IL Stainless Steel AISI 304 - DIN 1.4301



Stainless steel profile, AISI 304 standard, ensures good tolerance to most of diluted chemicals or strong detergents present in laboratories, food processing plants, commercial kitchens, slaughter houses, breweries and public toilets.

Anti-slip insert of 25 mm not applied to be ordered separately choosing among the colours black, transparent and white.

**FOLOSTAIR SI** is a product engineered to withstand both mechanical impact as well as chemical corrosion and ensures a safety step at the same time, thanks to the carborundum anti-slip strip on its surface, which is to apply after the laying and to be ordered separately. This profile is ideally applied on a pre-laid covering of industrial and/or commercial areas. It is suitable for restructuring jobs for compliance with safety norms.

This profile can be either glued or bolted with screws.

Illustrated scale dimension 1:1

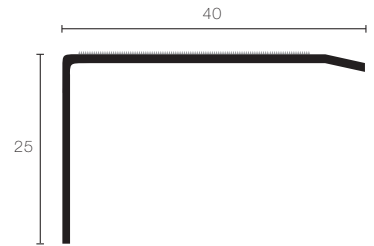

Material: Stainless steel AISI 304  
Length: 2,70 meters

BxH	Art.		
40x25	SI	400	IL
mm	Art.	Colour	
25x18,2 m	SW 25 C51	Black	
25x18,2 m	SW 25 C10	Transp.	
25x18,2 m	SW 25 C11	White	