



# step edge stair nosing aluminium profile

## folostair™ SL

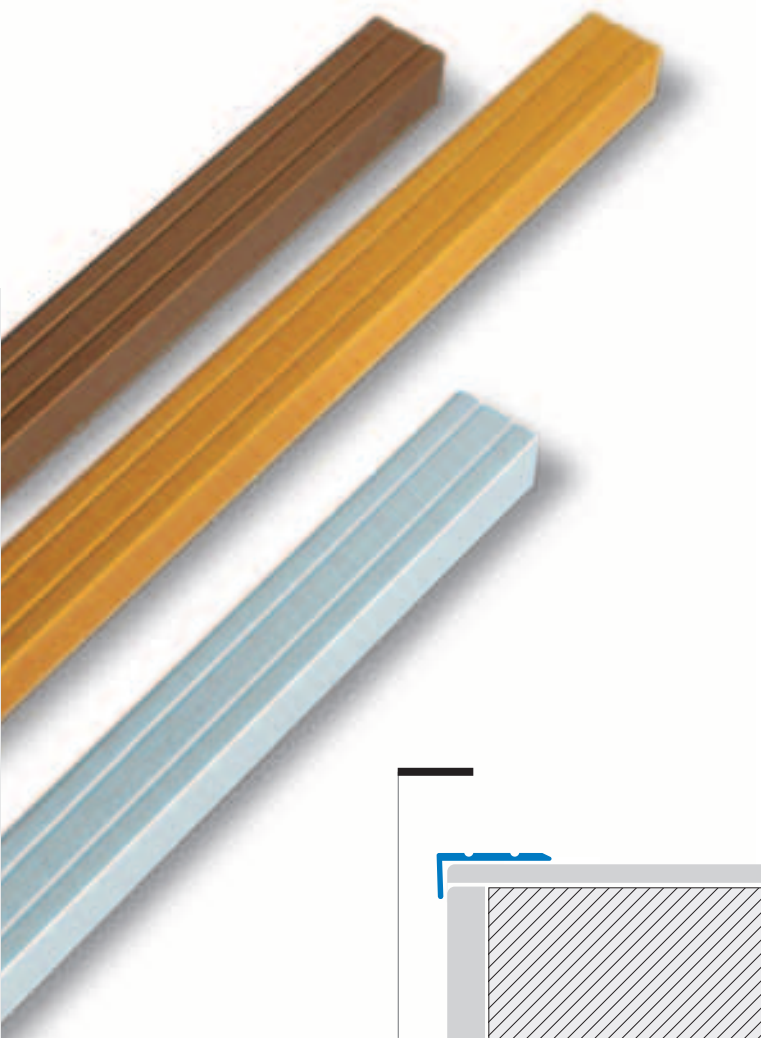

**FOLOSTAIR SL** is a corner edge aluminium profile adaptable for all stair coverings and very suitable for wooden ones. The profile is preferred in the domestic environments for it is easy to apply on existing coverings where corner edges need to be refurbished. Illustrated scale dimension 1:1



### FOLOSTAIR SL 10 A\* Anodised Aluminium

This anodised aluminium profile has an approx. 20 micron coating and is supplied in Silver, Gold and Bronze finish. It is tolerant to oxidation but less resistant to mechanical impact.

Material: Extruded Anodised aluminium  
Length: 2,70 meters  
Lengths ☒: 0,90 / 1,35 meters  
Colours\*: Silver, Gold, Bronze

BxH	Art.	self-adhes.	drilled
25x10	SL 10	ASA	ASF
25x10	SL 10	AOA	AOF
25x10	SL 10	ABA	ABF

### FOLOSTAIR SL 20 A\* Anodised Aluminium

Supplied in the self-adhesive version or with pre drilled holes with screws for DIY installation.

Material: Extruded Anodised aluminium  
Length: 2,70 meters  
Lengths ☒: 0,90 / 1,35 meters  
Colours\*: Silver, Gold, Bronze

BxH	Art.	self-adhes.	drilled
25x20	SL 20	ASA	ASF
25x20	SL 20	AOA	AOF
25x20	SL 20	ABA	ABF

### FOLOSTAIR SL 20\* Aluminium Wood Cladding Finish

Profile with a melamine wood tone in 6 different varieties. Good tolerance to abrasion comparable to most melamine coverings. The melamine embossing on the aluminium is particularly smooth therefore it remains quite clean and blends well with the flooring tone.

Material: Aluminium laminate covered  
Length: 2,70 meters

Finish	self-adhes.	drilled
Maple	SL 20 ACA	SL 20 ACF
Beech	SL 20 FAA	SL 20 FAF
Oak	SL 20 ROA	SL 20 ROF
Cherry	SL 20 CIA	SL 20 CIF
Light walnut	SL 20 NCA	SL 20 NCF
Dark walnut	SL 20 NSA	SL 20 NSF